

DS-KIS704EY

2-wire HD Villa Kit



- Great image quality of 2 MP resolution
- One-press to call, remote unlocking with App control
- Real plug & play
- IP65 water resistant and IK08 vandal resistant entry panel
- 7-inch touch screen indoor monitor, user friendly interface
-

□ Specification


Door station Processor ROM	
RAM Operation system Door station	Embedded Processor
Screen size Resolution	4 GB
Type Operation method Door station	256 MB
Supplement light	Embedded Linux operation system
Resolution Lens Wide dynamic range (WDR) FOV Video	
compression standard Door station	NA
Audio input Audio output Volume adjustment	NA
Audio compression standard	
Audio compression bitrate	Supplement light Low illumination, IR supplement lights
Audio quality Door station	2 MP
Linked indoor station capacity	1
Sub door station capacity Door station	Support
Wireless network Wi-Fi	Horizontal: 133°, Vertical: 82°
Door station RS-485	H.264
Built-in omnidirectional microphone	
Built-in loudspeaker	
Adjustable	
G.711 U, G.711 A	
64 Kps	
Noise suppression and echo cancellation	
Max.99	
16	
10/100 Mbps self-adaptive through 2-wire interface	
Only AP mode for configuration	
2 (RS485 out for Hikvision's sub module communication, RS485 for reservation)	
Lock control	2 (1 relay, max to 30 VDC, 2 A; 1 DC pulse, 20V 4A impulsive, 300 mA holding current, 30 ohm max)
Exit button	1
Door contact input	1 2 (supports Exit button or Door contact input) 12 VDC input
Alarm input	1
Power supply input	1
TAMPER	1
Debugging port	6 decimal DIP switch
Two-Wire	
DIP Switch	

Door station	
Button	0-2 (Flexible adjustment)
Indicator	4 LED lights(Opening door, Calling, Intercom, In use)
Power supply	48 V, Powered by distributor DS-KAD7060EY or 12 VDC
Power consumption	≤ 6 W
Working temperature	-40° C to 60° C (-22° F to 140° F)
Working humidity	10% to 90%
Dimension (W × H × D)	99.5 mm × 98.5 mm × 35 mm (3.92" × 3.88" × 1.37")
Application environment	Outdoor
Protective level	IP65 IK08
Installation	Surface mounting & flush mounting
Language	English, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Spanish, Romanian, Estonian, Croatian, Slovenian, Serbian, Ukrainian, Portuguese
Video Audio Distributor	
Power interface	48 VDC
Two-wire interface	6("IN""OUT" for casacading, CH1-CH4 for Door station and Indoor station)
Video Audio Distributor	
Power supply	48 VDC
Power consumption	CH1<30 W, CH2<30 W, CH3<30 W, CH4<30 W; MAX Total 30 W
Working temperature	-10 °C to 5 °C (14 °F to 131 °F)
Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	143.7 mm × 92.4 mm × 65.9 mm (5.66" × 3.64" × 2.59")
Installation	DIN rail installation
Indicators	6 Signal indicators; 1 Power indicator

□ **Available Model**


DS-KIS704EY

□ Dimension

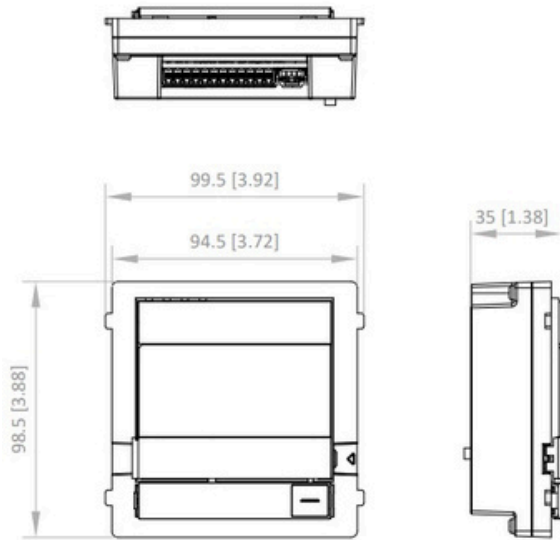




Unit:mm [inch]

SCALE	1:1
-------	-----

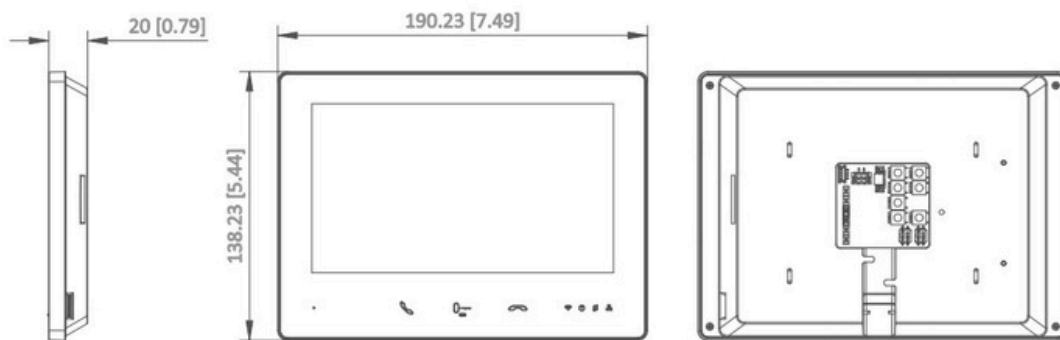

Unit:mm [inch]

SCALE	1:1
-------	-----

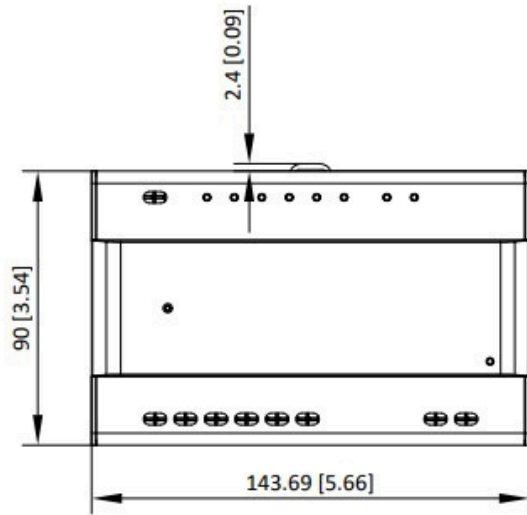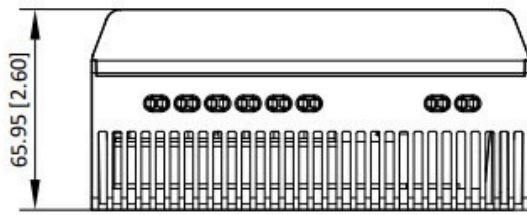

Unit:mm [inch]

SCALE	1:1
-------	-----

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

