


DS-KH7300EY-WTPE2/White **2-Wire DIY HD Indoor Station**

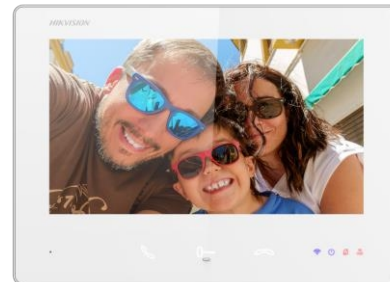

- Excellent Product Design: 7-inch touchscreen with high resolution of 1024×600
- Excellent Product Design: 3 touch buttons, accessible for people with disabilities
- Easy to Use: Rotary switch configuration
- Easy to Use: Plug-and-play, supports various connection topologies
- Easy to Use: Supports the Hik-Connect app
- Easy to Use: Multiple indicators: Wi-Fi, power, mute, in use
- Easy to Use: Up to 4 customizable virtual buttons
- View live feed from door stations
- Supports the Professional Studio/Trade button function (Automatically open doors)
- Supports floor call

▪ Specifications


System Parameters	
Operating System	Embedded Linux operating system
ROM	32 MB
RAM	128 MB
CPU	Embedded processor
Display specifications	
Screen size	7 inches
Operating method	Capacitive touchscreen
Type	Color TFT display
Resolution	1024 × 600
Video Parameters	
Video compression standard	/
Video	/
Lens	/
FOV	/
WDR	/
Resolution	/
Focal length	/
Audio Parameters	
Video compression standard audio	G.711 U G.711 A
Audio Input	1 built-in omnidirectional microphone
Audio output	1 built-in speaker
Audio compression rate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Event Capacity	200 photos captured (with TF card)
Indoor extension capacity linked indoor	3
Network Parameters	
Communication protocol	TCP/IP, RTSP
Wi-Fi standard	2.4 GHz, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n
3G/4G Standard	/
Zigbee	/
Device Interfaces	
Alarm Input	1
TAMPER	/
RS-485	/
USB	/
TF card	Max. 128 GB, SD 2.0 or earlier
Alarm output	/
DIP Switch	2 decimal DIP switches and 2 binary DIP switches
Power input	24 VDC, 2.5 A
Two-wire IP interface	2, 1 for input, 1 for output

General	
Button	3 touch buttons (Answer, Unlock, Hang Up) + 1 physical button (Reset)
Installation	Surface Mount
Indicator	4 (Wi-Fi, Power, Silent, In Use)
Protection Level	/
Operating temperature	-10 °C to 50 °C (14 °F to 122 °F)
Operating humidity	10% to 90% (non-condensing)
Dimensions	190.2 mm × 138.2 mm × 20 mm (7.5" × 5.4" × 0.8")
Battery	/
Power supply	24 VDC, 2.5 A
Application Environment	Indoors
Power consumption	≤ 5 W
Language	English, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Spanish, Romanian, Estonian, Croatian, Slovenian, Serbian, Ukrainian, Portuguese

▪ Available Model

DS-KH7300EY-WTPE2/White

▪ Dimensions

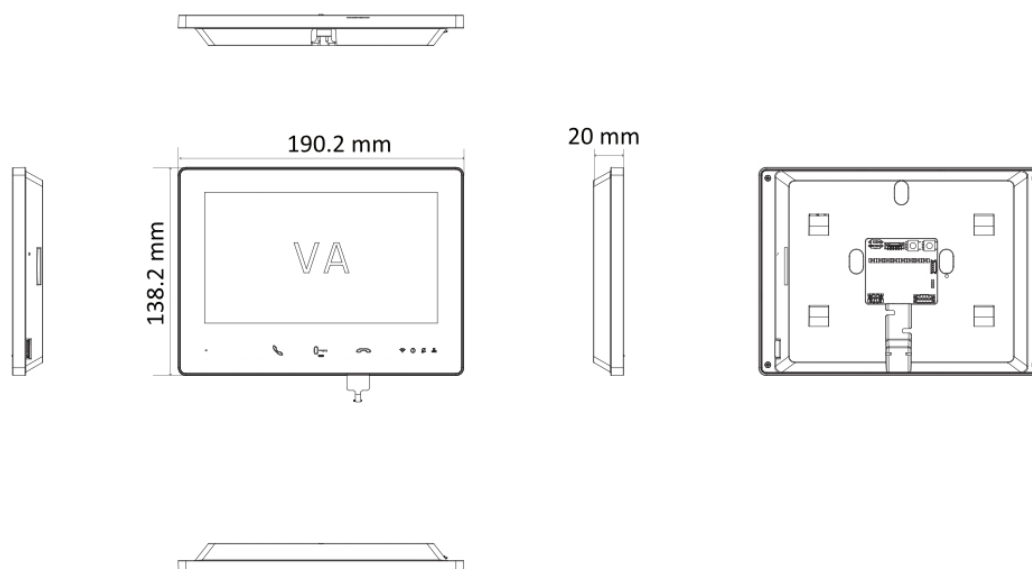

See Far, Go Further



www.hikvision.com
support@hikvision.com

» e a a a G O

Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to make modifications without notice.

7-77NV7E7ON