

## DS-PK670MDW-HWE Touchscreen Keypad



- 7-inch LCD touch screen with intuitive interface for clear display and easy system control.
- Supports LAN, Wi-Fi, and bus connectivity for flexible installation.
- Supports live camera preview via Wi-Fi or LAN.
- Supports event review with verification video storage with TF card.
- Shortcut keys for quick operation and flexible relay or area control.
- Supports 2 wired zones and 1 relay output for flexible integration with external devices.
- Built-in tag reader for convenient and secure user authentication.
- Supports keyfob control (868MHz)

## ▪ Specification

<b>Inputs(Zones)</b>	
Max. Zones	2
On-board zones	2
<b>Outputs</b>	
Max. outputs	1
<b>Peripherals</b>	
Wireless keyfob	64
<b>Event logs</b>	
Event log records	200
<b>User interface</b>	
Display	7" Colorful LCD with resolution 600*1024
Indication	1 indicator(Yellow\Green\Red)
Key button	1
<b>Authentication</b>	
Tag	Supported M1/DESFire® Card
Keyfob	64
PIN	4~6 digits
<b>Bus interconnection</b>	
Bus-extender	x
Bus technology	Half-Duplex RS-485
Bus wiring	4-Core Alarm Cable (at least 2x0.5mm <sup>2</sup> +2x0.22mm <sup>2</sup> )
<b>Wireless interconnection</b>	
Frequency	868Mhz
Wireless technology	R3
Transmission modulation	GFSK
Transmission range	800m(open area)
<b>Communication interfaces</b>	
LAN/Ethernet	Supported,10/100 Mbps self-adaptive
Wi-Fi	Supported,802.11b/g/n (2.4GHz)
<b>Power supply - general</b>	
Quiescent current	270mA@12VDC
Input voltage	12 VDC nominal (9~24 VDC),powered by bus
Max. current	400mA@12VDC
<b>Relay output</b>	
Relay output	1,1A 30VDC
<b>Environmental</b>	
Operating temperature	-10°C to 50°C
Storage temperature	-10°C to 50°C
Relative humidity	10%-90% non-condensing
<b>Physical</b>	
Dimension (W × H × D)	122mmx218.7mmx27mm
Weight	400g
Installation method	Wall mounting
Tamper-proof	Front and Rear


Compliance	
Electrical conformity	CE,CB
EN 50131	Security Grade 2,Environmental Class II
Indication	
LED indication	Supported
Hardware features	
SD card	FAT32 up to 128G
Loudspeaker	Supported
Mic	Reserved
Debug port	2
General	
Application scenario	Indoor
Shell material	Plastic
Color	White or Black

#### ▪ Available Model

DS-PK670MDW-HWE/White

DS-PK670MDW-HWE/Black

#### ▪ Dimension

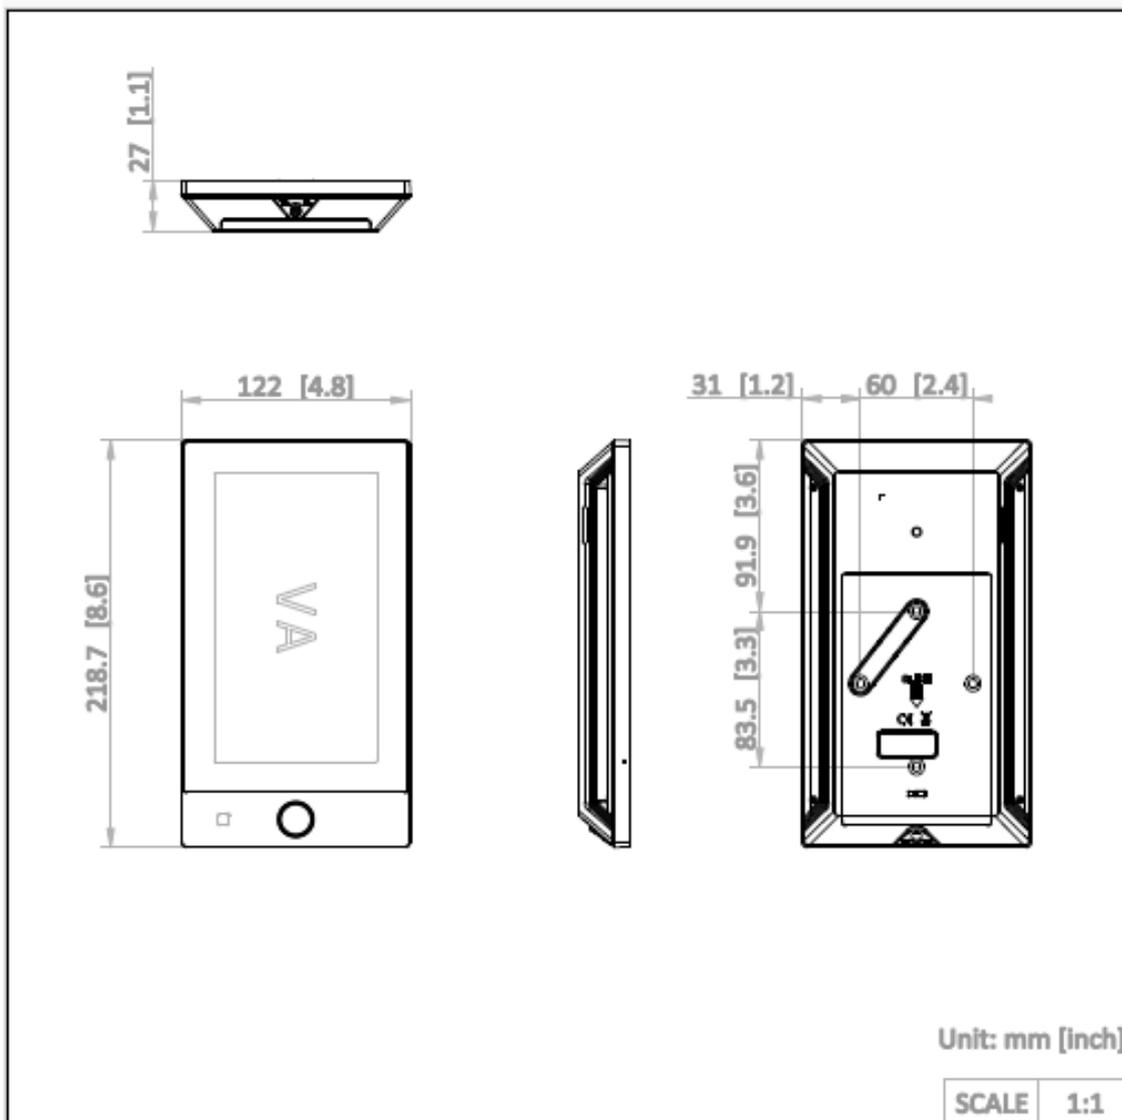

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

