

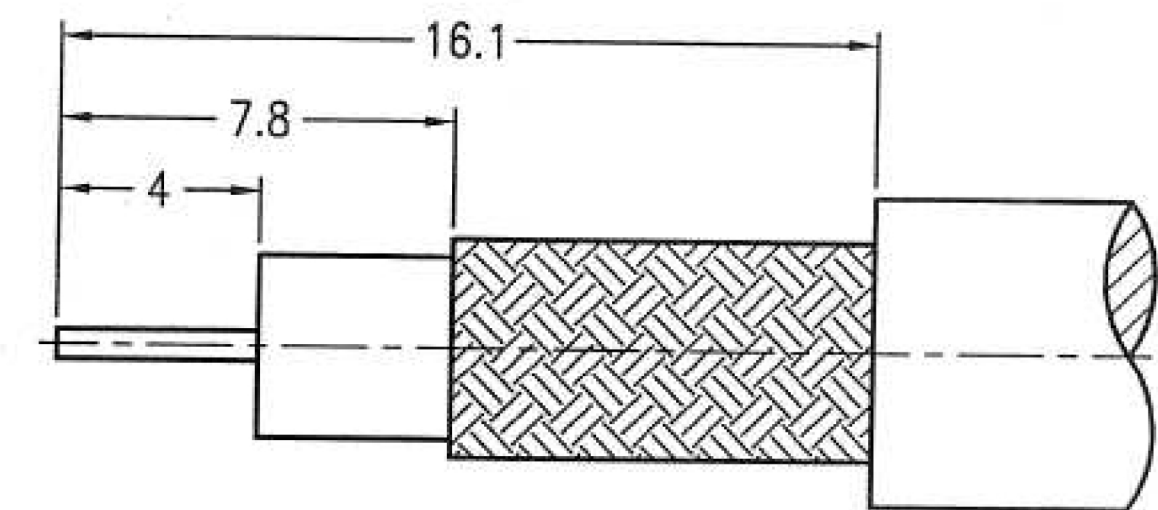
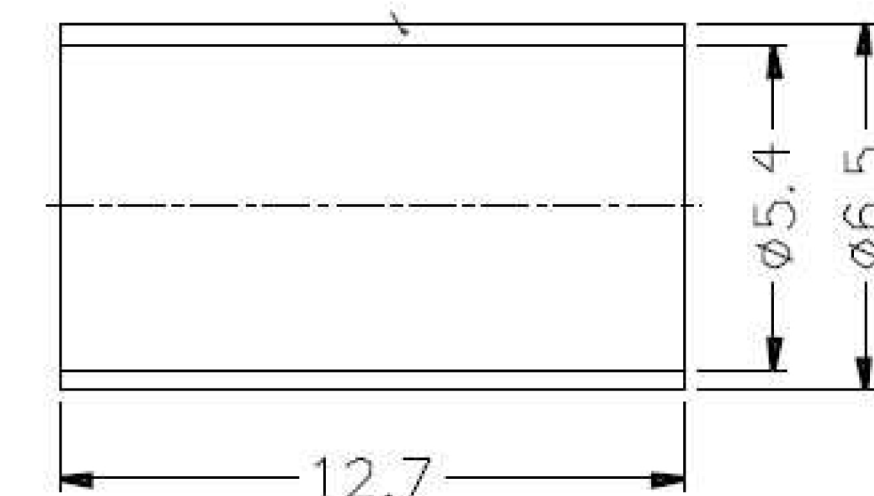


REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

- NOTES:
- MATERIALS AND FINISHES(PLATING THICKNESS IN MICRO-INCHES):
 BODY – BRASS, NICKEL PLATING
 CONTACT – BRASS, GOLD PLATING
 INSULATOR – DELRIN
 - ELECTRICAL:
 A. IMPEDANCE: 75 OHM
 B. FREQUENCY RANGE: DC 0–2 GHz
 C. VSWR(RETURN LOSS): 1.3 (17.692 dB), MAX.
 D. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
 - MECHANICAL:
 A. DURABILITY: 500 CYCLES MIN.
 B. TEMPERATURE RANGE: –65°C to +165°C
 - CRIMPED FERRULE
 HEX CRIMP SIZE .213"
 - CRIMPED CONTACT PIN
 HEX CRIMP SIZE .068"

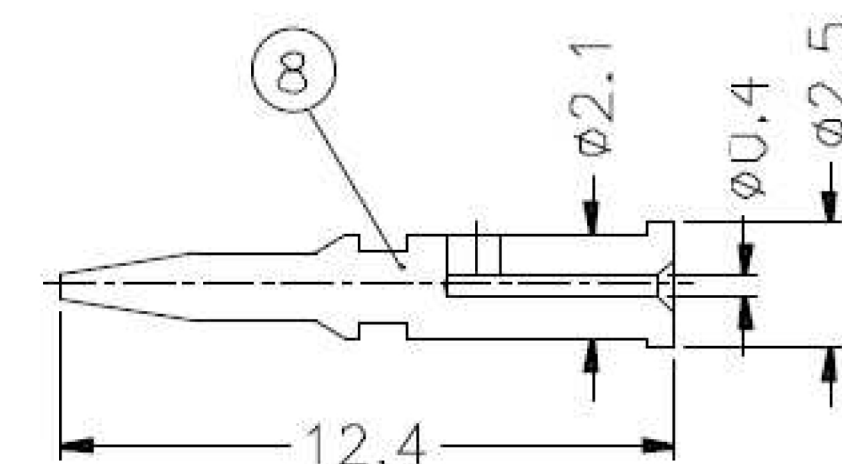

RECOMMENDED
CABLE STRIPPING DIM'S

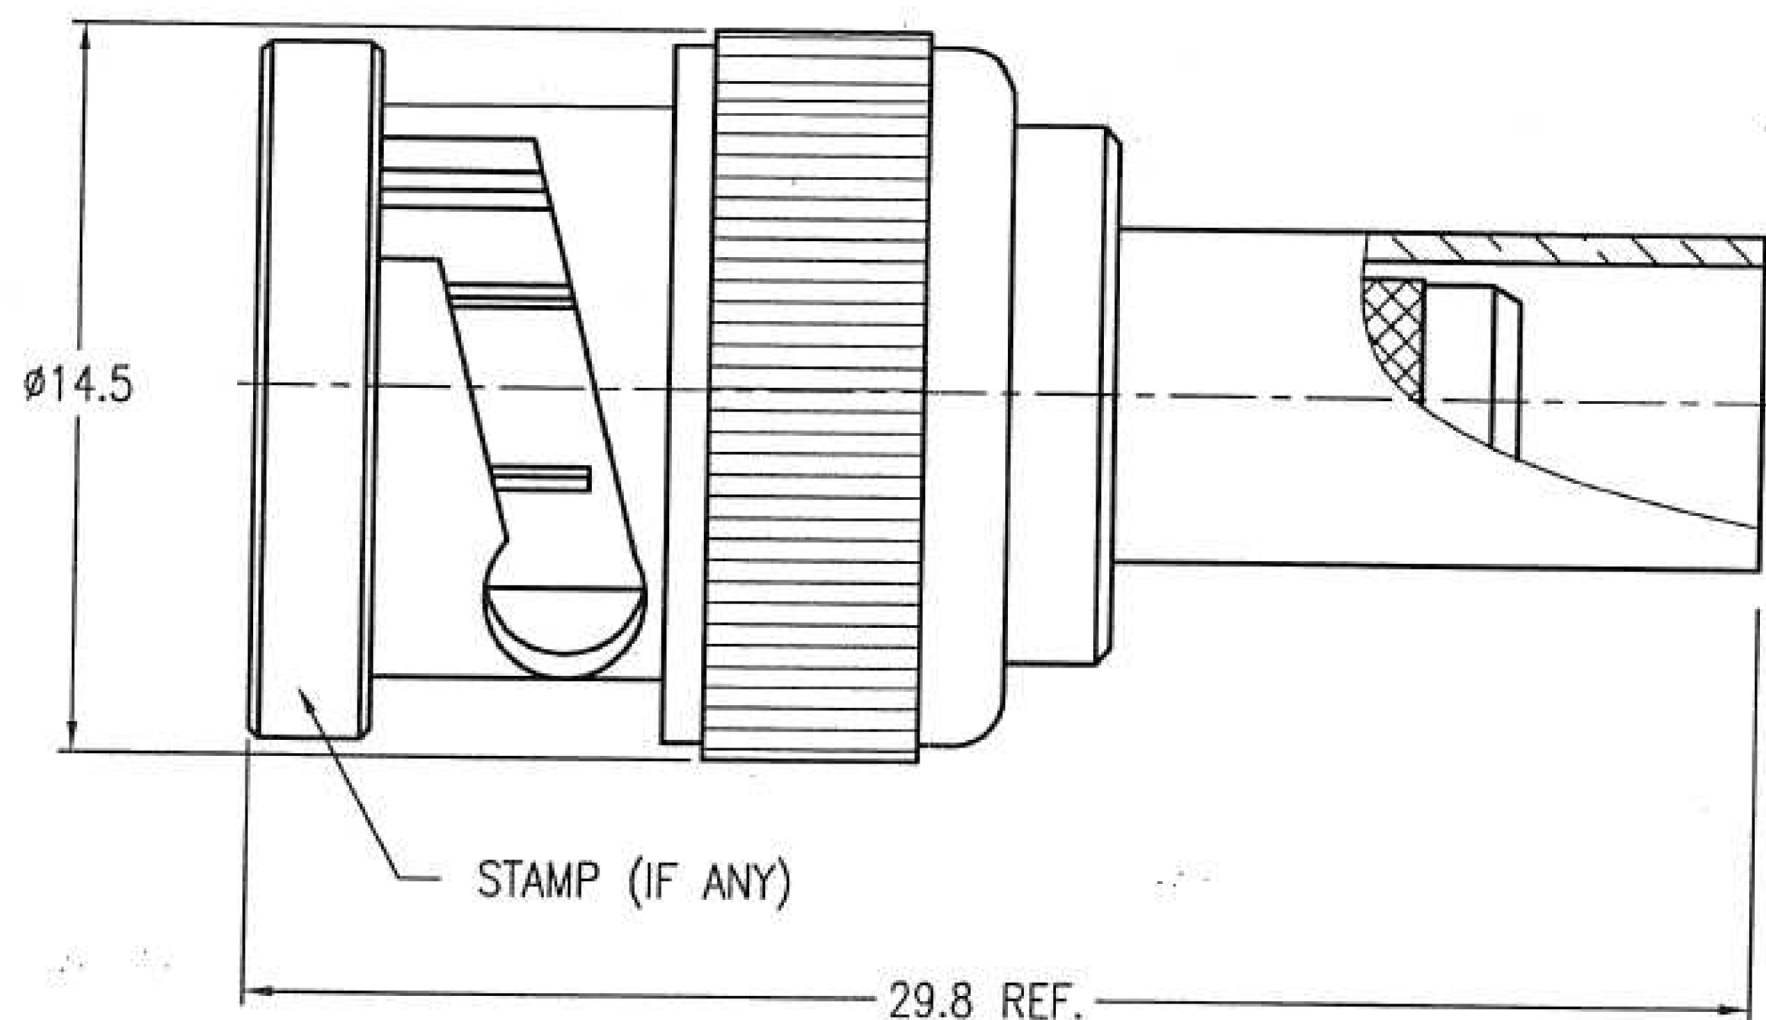

9	FERRULE	NOTE 6	NOTE 3	1	FR-91/78-86/74 X127
8	CONTACT PIN	NOTE 1	NOTE 5	1	B1121AA-8-25/11
7	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
6	SPRING	SK5	NOTE 4	1	B50000-6
5	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
4	GASKET	RUBBER	RED	1	GS-115/8X15
3	INSULATOR	DELRIN	NATURAL	1	B50000-3-75-A
2	BODY	NOTE 1	NOTE 3	1	B50000-2-705/ 52
1	SHELL	NOTE 1	NOTE 3	1	B50000-1-B
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

"Merce non prodotta in UE" - "Goods are not produced in UE"

DIMENSIONS ARE IN MILLIMETERS			PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES			APPROVED	DATE
0.5-6 = ±0.2			10-11-01'	
6-30 = ±0.4			CHECKED	DATE
30-120 = ±0.6			10-11-01'	
120-315 = ±1			DRAWN	DATE
315-1000 = ±1.6			10-11-01'	
1000-2000 = ±2.4				
SCALE	3/1	ISSUE	A	FILE NO.



TITLE BNC CRIMPING FOR MINI RG59

DRAWING NO.

ITEM NO.